

MAIN TECHNICAL DATA

ALL	YT	AWP
LDOAWLP	V	
TSYN _W WPBIS DOAWLP PY	V	
S TP TY LP P PNBIS DOAWLP	V	
LP P PN	e	
LDO PY		
LDO S TPBIS DO PY	V	
LDO/LTY S NNT		
LDO PVBIS DO PY	V	
LDO S NNT 8V _W PY	V	
LDO S NNT-PV _W PY	V	
8c AN PY		
bTS: PLTY LDO S NNT-PV _W PY	: PLTY	
LDO W _P .LINT -W-PV _W PY		
LDO-W MV.LINT -W-PV _W PY		
8SYNW YO LNP	: PLTY	
. W _L NP-P _W PY. YIN		
. YIN.W _W NP/P -W _b DO SPP	9	
. YP NP . YINL W V	9	
. TNT PTIYNPL 8Y LDO. YIN NP		
. YIN TT TY		
8L 8a _W L	VR	
YPYWL P P	L	
SW TP	DL	
LDO: PLTY P PNP	: PY	:: ::

配套的真空开关设备应满足的机械参数

MECHANICAL DATA OF VACUUM SWITCH EQUIPPED WITH THE INTERRUPTERS

ALL	YT	AWP
aPIR: PYR PO T		
aPIR.W TR PO W		
. YIN - YP/ LTYL . W TR: PLTY		
: T W _P Td . YIN.W TRDO: PYR		
LDO. YIN P P	9	2000 ⁺³⁰⁰ ₀
. YIN P PL NYIN S Y		1400 ⁺³⁰⁰ ₀
8c MYO NYINL PYR: PLTY		
:a I _W O TR: PYR		

9 P% L_WSLNPT N M_WRY YPP

9 P% P_W B_W S_WPN N_WPO L_WP TPY NL L PW TR O d P . DO-

9 P% P_W movable stem of the VI could only suffering no more than 45N.m twisting force and in order not to damage the metal bellows, the movable stem should be prevent from rotation when assembling. For more requirements please check the Instructions of Usage.

灭弧室的外形尺寸，安装尺寸应符合按规定程序审批的图样要求，见图2。

TD-12/1250-25A2 (2366-G)

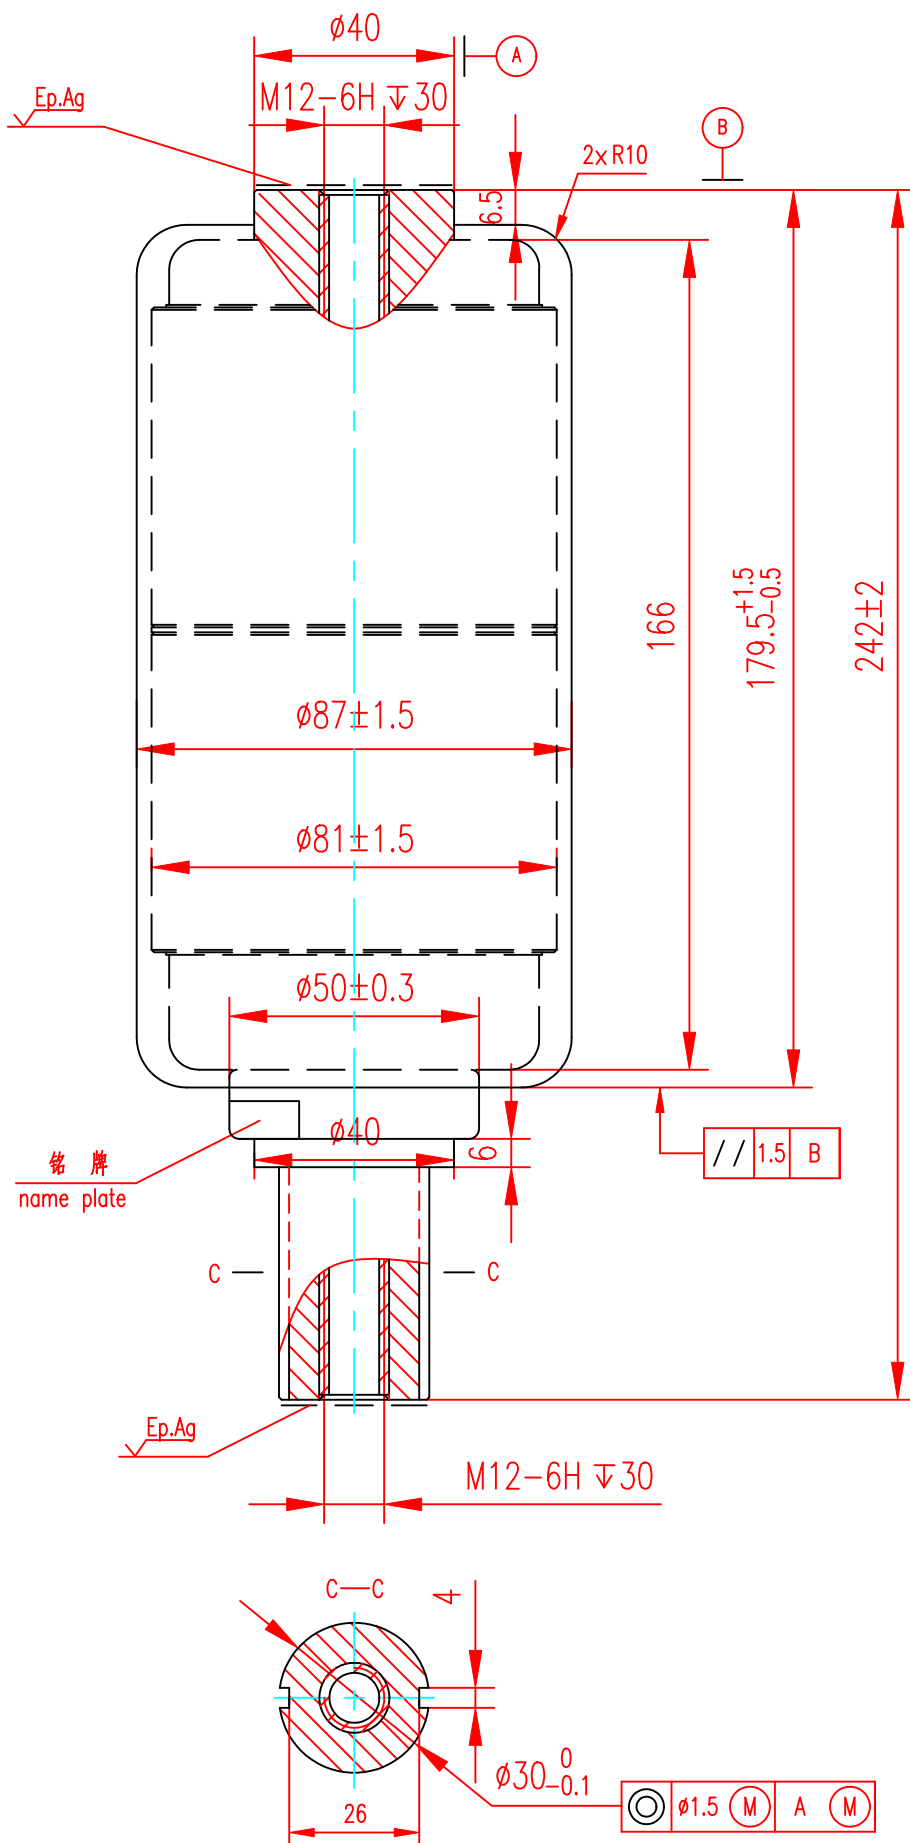


图2

责任	签字
制图	
描图	
描校	
旧底图总号	
底图总号	
日期	签字